


OPOFFERINGSANODEN - ALUMINIUM

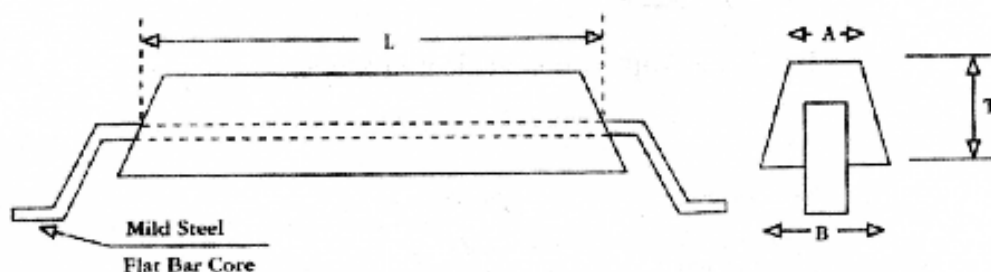

Anode Ref.	L (mm)	A (mm)	B (mm)	T (mm)	KERN (mm)	Netto gewicht (Kg)	Bruto gewicht (Kg)
AJW 400	1250	89	115	103	50mm x 8mm flat	34.5	40.0
AJW 460	1500	89	115	102	50mm x 8mm flat	40.0	46.0
AJW 660	1500	126	145	112	50mm x 8mm flat	60.0	66.0
AJW 760	1530	126	145	121	65mm x 10mm flat	65.7	76.0
AJW 870	1500	126	151	146	50mm x 10mm flat	80.0	87.0
AJW 900	1530	126	151	150	50mm x 10mm flat	83.0	90.0
AJW 1185	1880	155	185	160	50mm x 12mm flat	110.0	118.5
AJW 1820	1600	183	283	194	75mm x 12mm flat	165.0	182.0

Kenmerken:

- Open circuit potentiaal: -1.07V (Ag/AgCl referentie electrode).
- Capaciteit: 2550 Amp. Hr/Kg.
- Verbruik: 3.4 Kg/Amp. Yr.

Chemische samenstelling:

Zn%	Cu%	Si%	Fe%	In%	Al%
2.0-5.0%	0.05% max.	0.13% max.	0.13% max.	0.01-0.05% max.	Rest