


OPOFFERINGSANODEN – ALUMINIUM

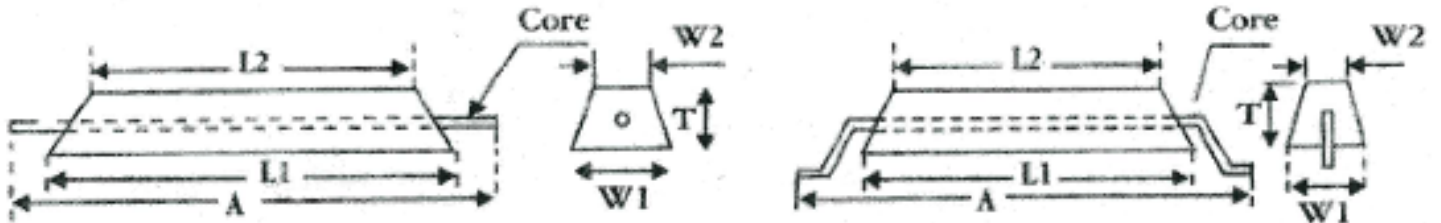

Anode Ref.	A (mm)	L1 (mm)	L2 (mm)	W1 (mm)	W2 (mm)	T (mm)	Core (mm)	Netto gewicht (Kg)	Bruto gewicht (Kg)
ATC/W 040	766	310	285	65	50	75	12,5	3,3	4,0
ATC/W 065	765	310	300	85	70	95	12,5	5,9	6,5
ATC/W 077	1070	610	590	65	50	75	12,5	6,8	7,7
ATC/W 096	1225	755	745	65	48	75	12,5	8,5	9,6
ATC/W 117	1800	1515	1480	55	48	50	12,5	10,2	11,7
ATC/W 130	1475	1000	980	65	50	75	12,5	11,7	13,0
ATC/W 137	1675	1215	1190	70	34	70	12,5	12,3	13,7
ATC/W 161	1800	1495	1485	65	55	60	12,5	14,6	16,1
ATC/W 160	1730	1255	1240	62	52	75	12,5	14,5	16,0
ATC/W 190	1985	1520	1490	65	48	75	12,5	17,3	19,0
ATC/W 230	1465	1020	985	85	73	95	16,0	20,1	23,0
ATC/W 280	1720	1260	1235	84	71	95	16,0	24,6	28,0