


# anotec

## HMWPE/KYNAR CABLE FOR CATHODIC PROTECTION

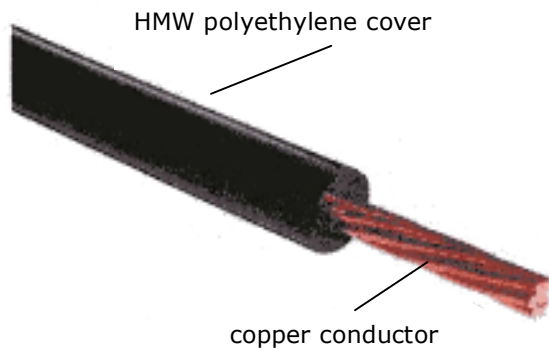

### ***Uitvoering:***

The copper conductor is protected by a Kynar® casing and a cover of HMW (High Molecular Weight) polyethylene.

This cable is usable for most CP-installations on land and in the sea. The external cover provides a protector against resistance and aggressive gases. This type of cable doesn't need further physical protection in the soil / water.

Kynar cable is available from 6 to 185 mm<sup>2</sup>.

### ***Specific data:***

Section (mm <sup>2</sup> )	Resistance at 20°C (Ohm)	Diameter (OD-mm)	Weight (kg/km)
6	3,08	7,44	89
10	1,83	8,37	144
16	1,15	9,42	196
25	0,727	11,07	312