


## ZINC SACRIFICIAL ANODES

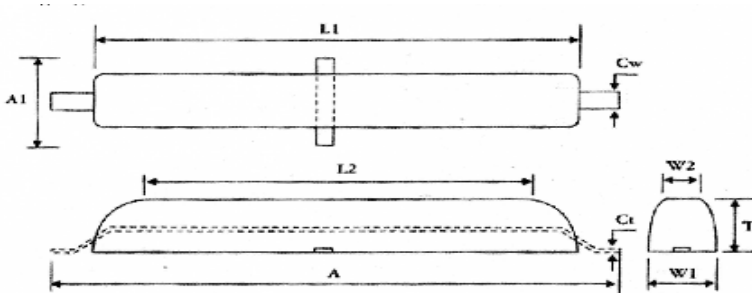

Anode Ref.	A (mm)	L1 (mm)	L2 (mm)	W1 (mm)	W2 (mm)	T (mm)	Al (mm)	Cw (mm)	Ct (mm)	Nett weight (Kg)	Gross weight (Kg)
ATZN 043	320	220	180	115	75	30	-	25	6	3.9	4.3
ATZN 055	400	300	275	90	65	40	-	25	6	5.0	5.5
ATZN 106	425	325	285	160	120	35	-	30	6	10.0	10.6
ATZN 124	565	465	400	110	80	40	-	40	6	11.3	12.4
ATZN 160	600	520	400	120	80	40	-	40	6	14.8	16.0
ATZN 200	685	585	540	120	80	55	-	40	8	18.5	20.0
ATZN 260	900	800	750	120	90	40	-	40	6	24.0	26.0
ATZN 353	680	580	480	150	100	70	-	50	8	33.0	35.3
ATZN 375	1020	920	820	150	90	50	-	50	8	34.2	37.5

### Anode characteristics:

- Open circuit potential: 0.95V (Ag/AgCl reference cell).
- Anode capacity: 780 Amp. Hr/Kg.
- Consumption rate: 11.25 Kg/Amp. Yr.

### Chemical composition:

Al%	Cd%	Pb%	Fe%	Cu%	Si%	Zn%
0.1-0.5%	0.025-0.15%	0.006% max.	0.005% max.	0.005% max.	0.125% max.	Remainder