


## ALUMINIUM SACRIFICIAL ANODES

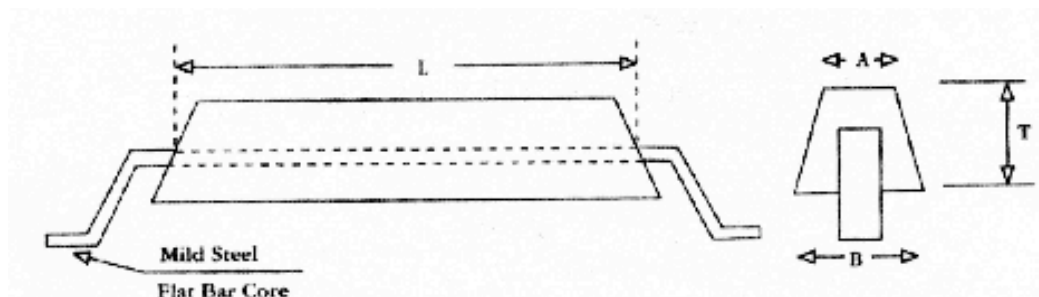

Anode Ref.	L (mm)	A (mm)	B (mm)	T (mm)	CORE (mm)	Nett weight (Kg)	Gross weight (Kg)
ATA 400	1250	89	115	103	50mm x 8mm flat	34.5	40.0
ATA 460	1500	89	115	102	50mm x 8mm flat	40.0	46.0
ATA 660	1500	126	145	112	50mm x 8mm flat	60.0	66.0
ATA 760	1530	126	145	121	65mm x 10mm flat	65.7	76.0
ATA 870	1500	126	151	146	50mm x 10mm flat	80.0	87.0
ATA 900	1530	126	151	150	50mm x 10mm flat	83.0	90.0
ATA 1185	1880	155	185	160	50mm x 12mm flat	110.0	118.5
ATA 1820	1600	183	283	194	75mm x 12mm flat	165.0	182.0

### **Anode characteristics:**

- Open circuit potential: -1.07V (Ag/AgCl reference cell).
- Anode capacity: 2550 Amp. Hr/Kg.
- Consumption rate: 3.4 Kg/Amp. Yr.

### **Chemical composition:**

Zn%	Cu%	Si%	Fe%	In%	Al%
2.0-5.0%	0.05% max.	0.13% max.	0.13% max.	0.01-0.05% max.	Remainder